


alfafonet[®]
Complete Connectivity Solutions



**OUTDOOR
FIBER TERMINATION
CLOSURE**


**Fiber Optic Closure
OFTC**

OUTDOOR FIBER TERMINATION CLOSURE




Product Family


Fiber Optic Closure



Protection Rating

IP 68

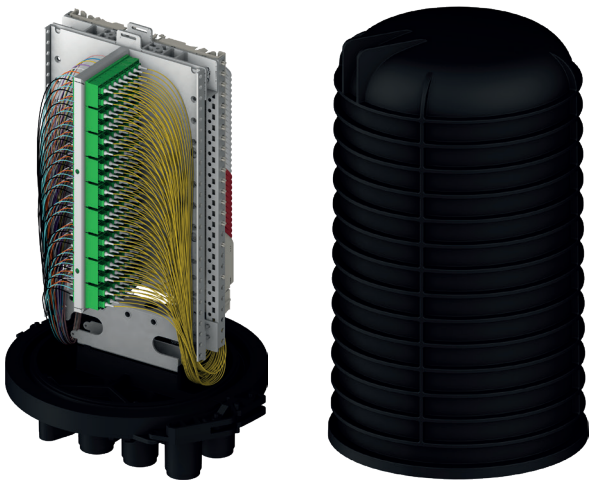




H 488 mm

W 247 mm

D 247 mm



Available Colors:

Black

PRODUCT OVERVIEW

The generic closure OFTC is an environmentally sealed enclosure for allowing splicing and passive component integration in the external network, and is a multi-purpose mechanical shelf assembly used to store splices of external/indoor cable to pigtails. These shelves combine splice,distribution, storage and patching functions.


Features

- ›Single-ended, O-ring sealed dome closure
- ›Compatible with most common cable types: e.g. loose tube, central core, ribbon fiber
- ›Universal mounting system
- ›Closure can be used in aerial, pedestal and underground (up to 5 meters) environments
- ›Compatible with optical splitter trays




Specifications

Model No	Cable Entry Drop Port Style	Cable Entry Main Port Style	Cable Ports (quantity)	Cable Sealing Type	Closure Sealing Type	Mounting	Network Area Type
OFTC-144	Round	Oval	7	Gel kit (optional) Heat shrink	Dome-to-base clamp with O-ring	Pole Strand Wall	Distribution




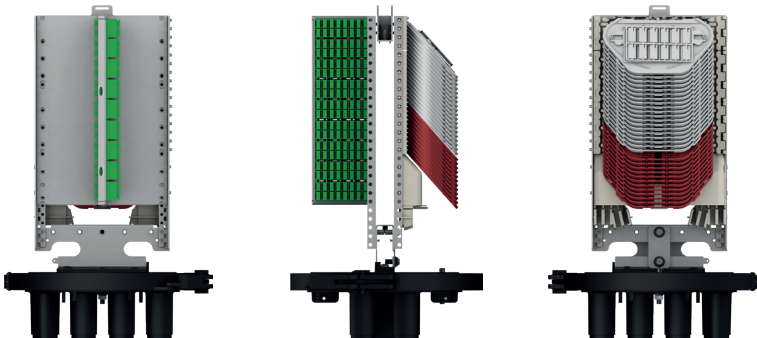


OUTDOOR FIBER TERMINATION CLOSURE

Dimensions

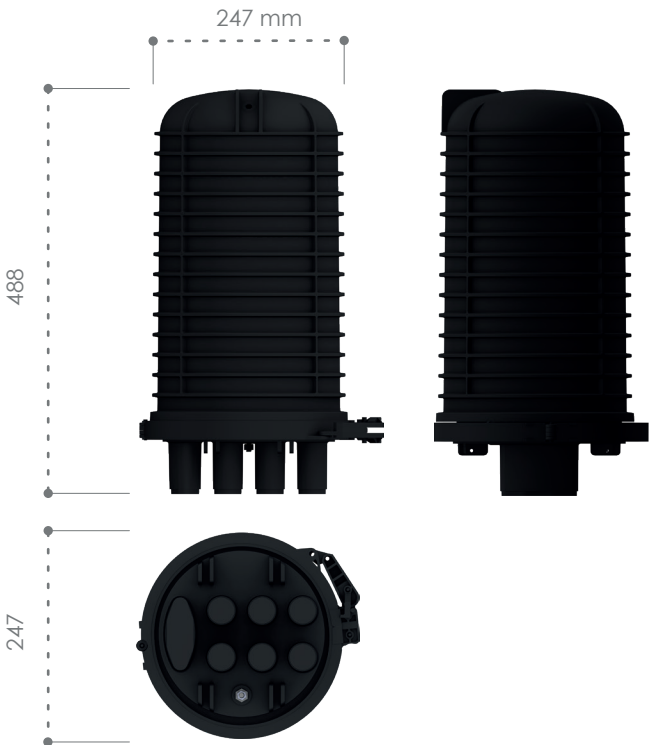


Details

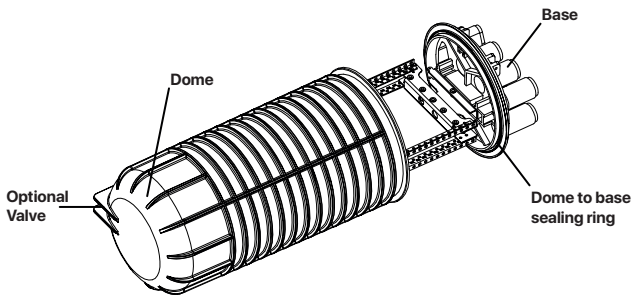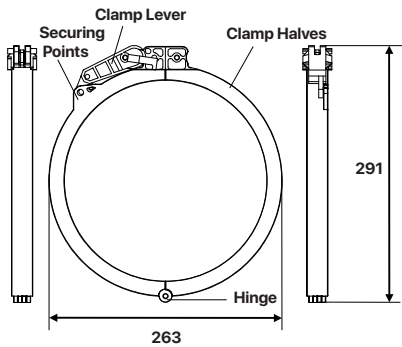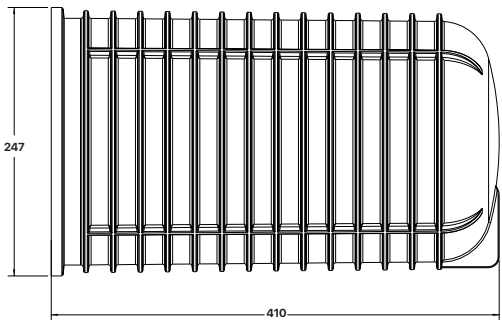


OUTDOOR FIBER TERMINATION CLOSURE




Product Family
Fiber Optic Closure




Protection Rating
IP 68

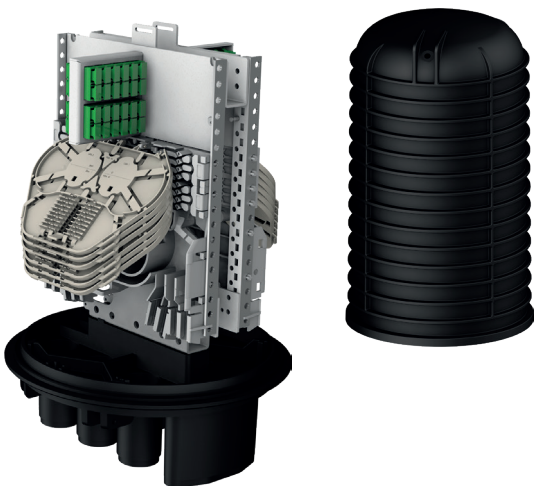



H 370 mm
W 247 mm
D 247 mm




Available Colors:
Black

PRODUCT OVERVIEW

The generic closure OFTC is an environmentally sealed enclosure for allowing splicing and passive component integration in the external network, and is a multi-purpose mechanical shelf assembly used to store splices of external/indoor cable to pigtails. These shelves combine splice,distribution, storage and patching functions.



Features

- ›Single-ended, O-ring sealed dome closure
- ›Compatible with most common cable types: e.g. loose tube, central core, ribbon fiber
- ›Universal mounting system
- ›Closure can be used in aerial, pedestal and underground (up to 5 meters) environments
- ›Compatible with optical splitter trays

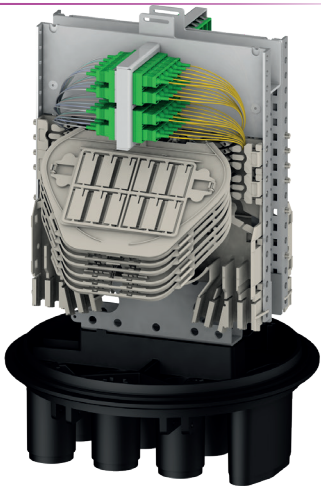


Specifications

Model No	Cable Entry Drop Port Style	Cable Entry Main Port Style	Cable Ports (quantity)	Cable Sealing Type	Closure Sealing Type	Mounting	Network Area Type
OFTC-48	Round	Oval	7	Gel kit (optional) Heat shrink	Dome-to-base clamp with O-ring	Pole Strand Wall	Distribution



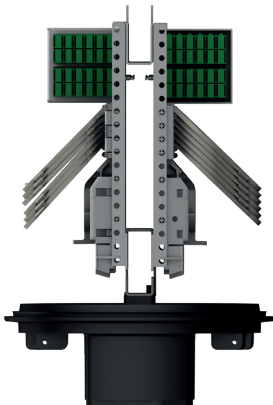
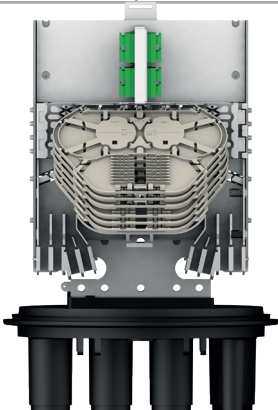


OUTDOOR FIBER TERMINATION CLOSURE

Dimensions

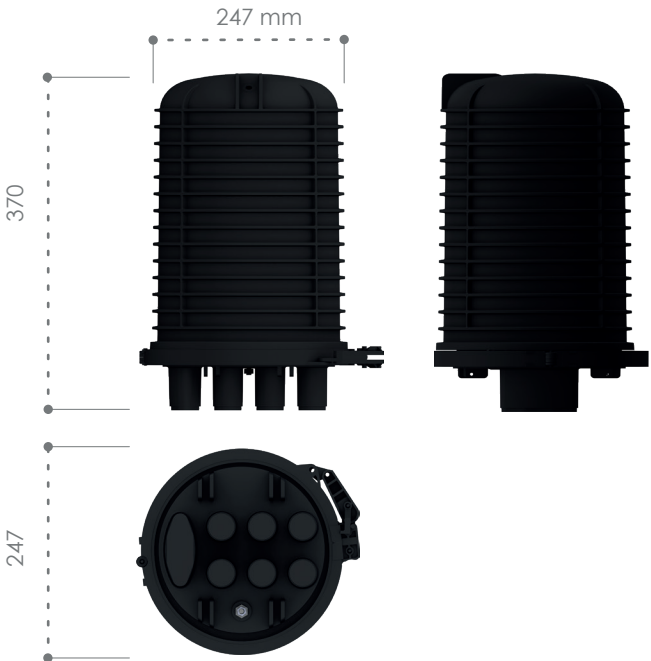





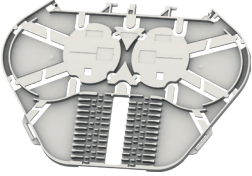

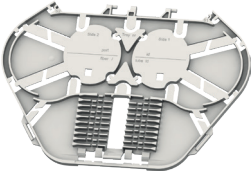


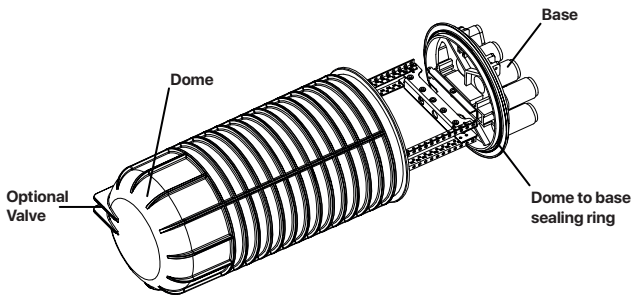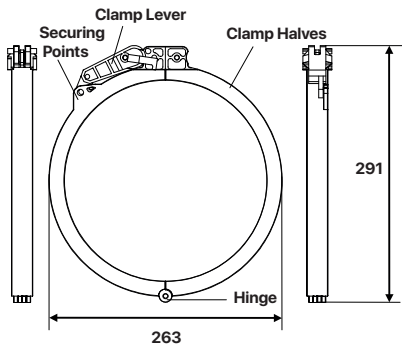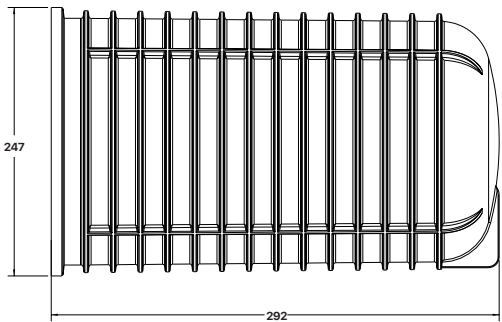
Details



OUTDOOR FIBER TERMINATION CLOSURE

PRODUCT ACCESORIES

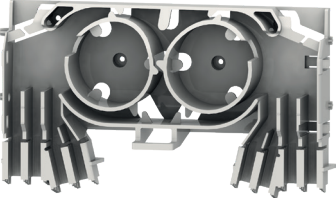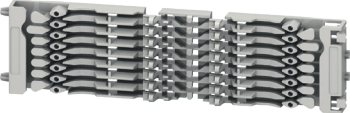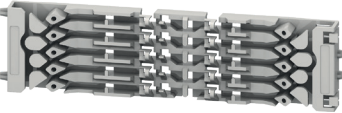PRODUCT VISUAL	PRODUCT EQUIPMENTS, DESCRIPTION	
	Modular FAS Block	
	Embedded FAS Block	
	Splice tray holder 8 pcs 4mm or 4 pcs 8mm Splice Tray Capacity, 4 Slot	
	Splice tray holder 5 pcs 4mm or 5 pcs 8mm Splice Tray Capacity, 4 Slot	
	Splice tray holder 4 pcs 4mm Splice Tray Capacity, 2 Slot	
	12 FO Capacity Splice Tray , 4mm thickness	 4 mm Splice Tray Cover
	9 FO Capacity Splice Tray , 1 Bare Splitter Capacity, 4mm thickness	
	12 FO Capacity Splice Tray, 8 mm thickness	2 pcs 1x8/1x4/1x2 PLC Splitter Capacity Splice Tray, 8 mm thickness 