


alfafonet[®]
Complete Connectivity Solutions




**FIBER OPTIC
DOME CLOSURE**

**Fiber Optic Closure
ALF-DC**


FIBER OPTIC DOME CLOSURE




Product Family
Fiber Optic Closure



Protection Rating
IP 68



H 488 mm
W 247 mm
D 247 mm



Available Colors:
Black



PRODUCT OVERVIEW

Fiber Optic Dome closures combine proven fiber management hardware with a highly reliable sealing system. Base-to-dome seals on ALF-DC closures are mechanical for ease of installation and re-entry, and cable seals feature a unique heat-shrink sleeve and hot-melt adhesive system that is installed with a hot-air gun. Common materials, accessories, and practices are used throughout the product line to simplify training, reduce inventory, and enhance productivity.

Specifications


Model No	Cable Entry Drop Port Style	Cable Entry Main Port Style	Cable Ports (quantity)	Cable Sealing Type	Closure Sealing Type	Mounting	Network Area Type
ALF-DC	Round 6	Oval 1	6+1	Gel kit (optional) Heat shrink	Dome-to-base clamp with O-ring	Pole Strand Wall	Distribution

Ordering Guide

Model No	ALF-DC-96C	ALF-DC-144C	ALF-DC-288C
Product Visual			
Fiber Optic Splice Tray Capacity	96 FO Capacity	144 FO Capacity	288 FO Capacity
Fiber Optic Splice Tray Quantity	8 Splice Trays	12 Splice Trays	24 Splice Trays

FIBER OPTIC DOME CLOSURE

Dimensions

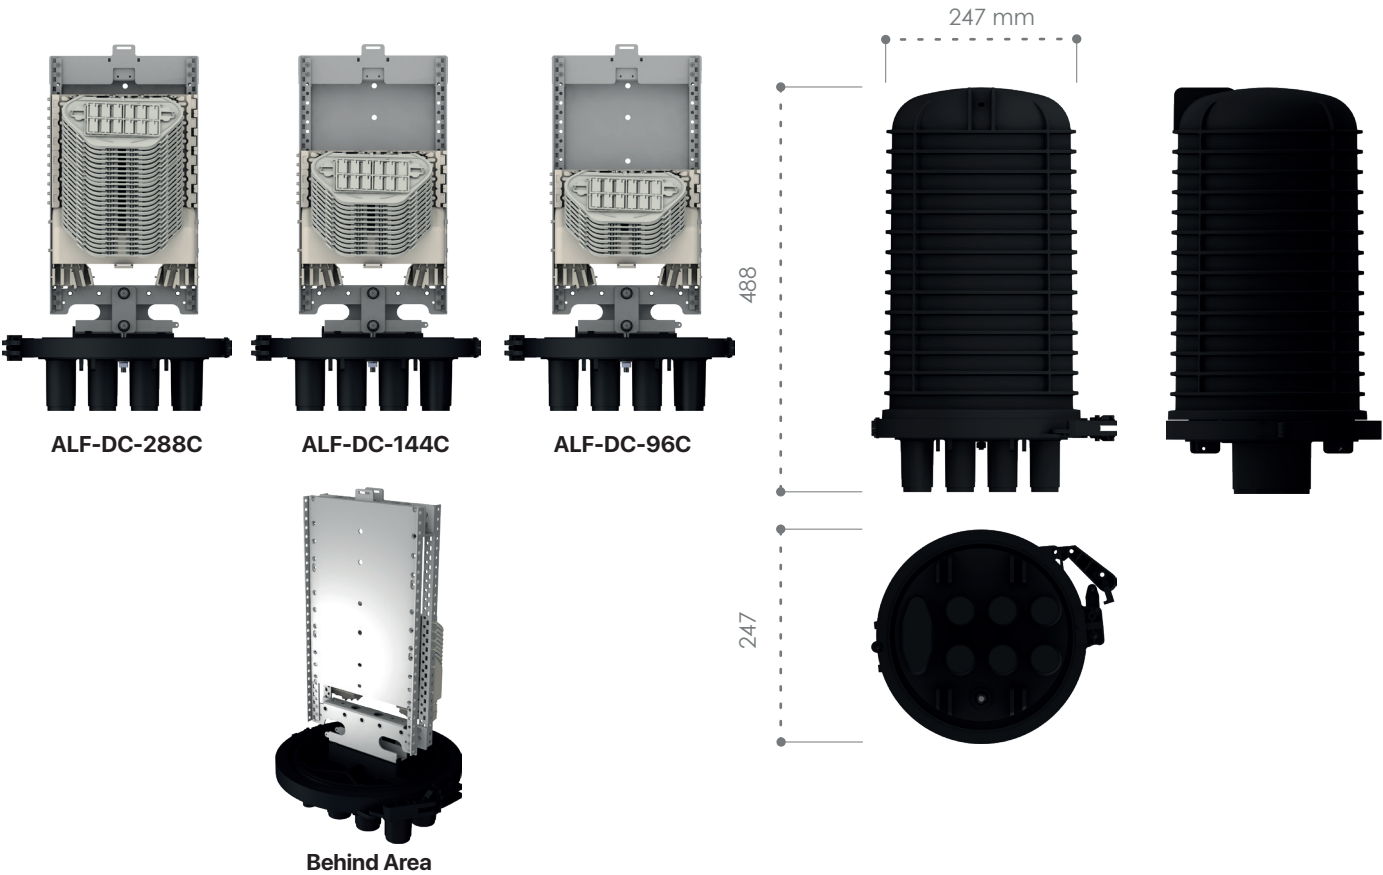

Details

