

INDOOR CABINETS
ODF RO



ODF RO

Product Family
Indoor Cabinets

Standarts

47U

Protection Rating

IP 20

19"





H 2285 mm

W 900 mm

D 325 mm



Available Colors: Light Grey(RAL7035)

We

Weight

Net ~170 kg Gross ~173 kg

ODF RO Optical Distribution Frames are an exceptionally rugged and strong cabinet enabling it to be used for all application. ODF RO offers a highly cost-effective and assembly-friendly solutions for numeroues applications in the field of fiber. The ODF RO is highly-configurable to the end-users requirements and provides unique features to benefit system designers, installers and network managers. Completely assembled standard cabinet can be delivered as a single enclosure with side panels or as a side by side cabinet. The rigidly welded frame construction can be dismantled and assembles easily without any special tools.

Features


- Secure solid front door wardrobe style with locking system, hinges and door stopper
- Removable side panels and front doors
- Standard 19" & ETSI Installations
- Bend radius protection throughout the frame
- ▶ Fully front accessibility
- Maximum flexibility and modularity

Specifications

- Durable textured powder coat finish available in and 2,0mm thicknesses, multi formed sturdy construction
- ▶ Black (Ral 9005), Light Grey (Ral 7035), Pebble Grey (Ral 7032) powder coating color options
- Back to back or/and side to side assembly possibility, possible to make wall mounting

Applications


- Exchange, primary distribution points, customer's premises Central Offices, telecommunication equipment rooms
- Weather-protected locations, such as building basements FTTX applications

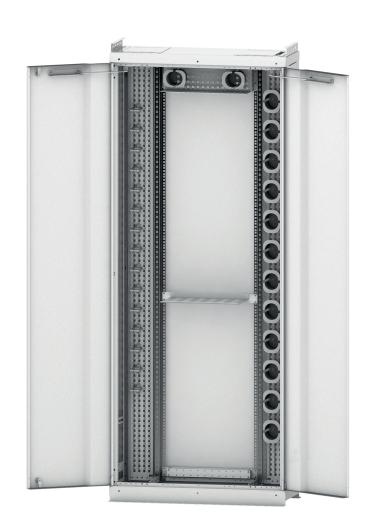




ODF RO

Dimensions

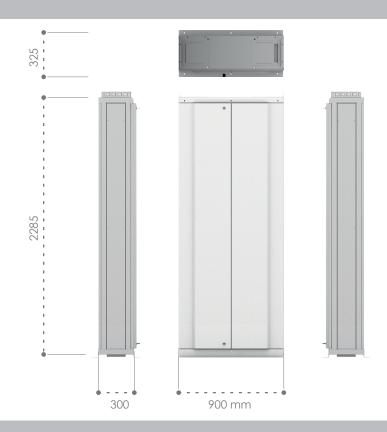


Exploded View

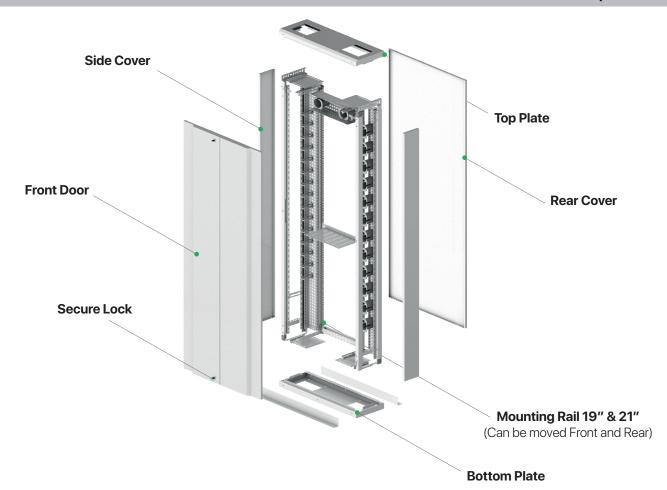



ODF RO

Key Features








✓ Plastic Cable Organizers

Plastic cable organizer for cable managing and routing

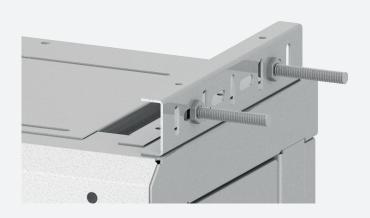

✓ Mounting Options

Back to back or/and side to side assembly possibility, possible to make wall / floor mounting





√ 19" & 21" Mounting Rail Options

Mounting Rail can be adjustable to 19" or 21"