

FH 308 OUTLET FIBER BOX

Ergonomically design, compact design.

Ability to allow cables to enter from rear or bottom of the unit

Removable cover for easy access

Indoor use for Wall mounted unit used for small and large business premises

Easily re-enter with a minimum of tools, saves time and cost


Up to 4 cores(heat shrink protective sleeve) or 2 cores(3M mechanical splices)

Can hold 2 SC simplex adaptor or 2 LC duplex adaptor

Can be used for BlownTube cable or common cables

Three (3) cable ports, each port for one cable with maximum diameter \varnothing 10 mm

ROHS compliance

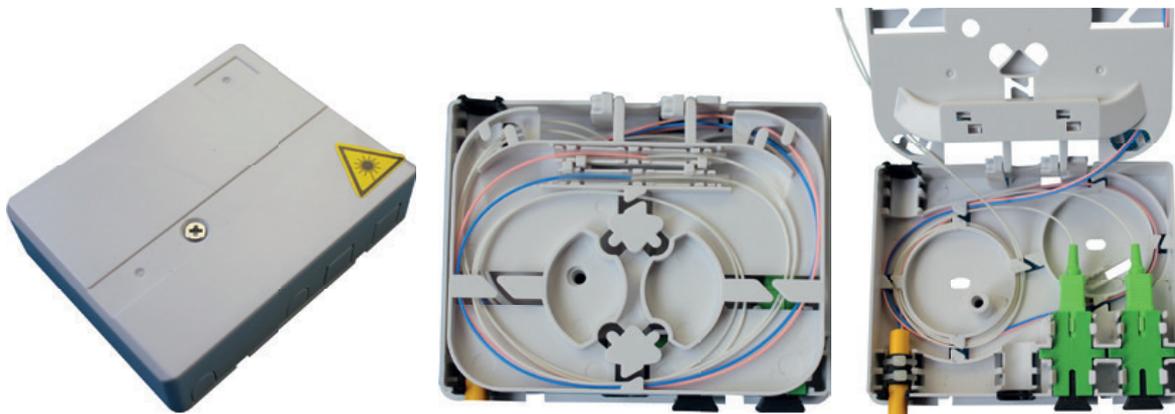

Specifications & Ordering Information

Order No		Cable Ports	Spliced Fiber Storage Capacity	Adaptor Capacity
ALF-FH-308	108.5x85x27	3 Cable ports (for cables with max diameter 10 mm)	4 cores(heat shrink protective sleeve) or 2 cores(3M mechanical splices)	2 SC Simplex or 2 LC Duplex Adaptors