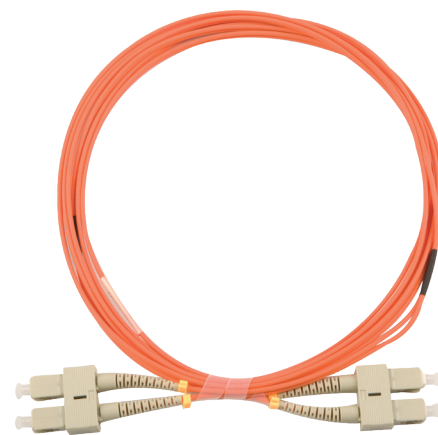


62.5/125(OM1) SIMPLEX & DUPLEX PATCH CORDS

Multimode Patch Cords are used to connect high speed and legacy network like Gigabit Ethernet, Fast Ethernet and Ethernet. Our multimode Patch Cords are manufactured using LSZH and PVC cables which conform to IEC, EIA, TIA and Telecordia standards. OM1 Patch Cords are terminated with our standard connector which gives optimum optical performance.

62.5/125 (OM1)

OM 1
62.5/125

Features

- SC, LC, ST, FC, MU and E2000 connectors
- LSZH or PVC orange colour cable
- 900µm tight buffer
- OM1 fibre conforms to TIA/EIA 492AAAA, IEC60793-2-10
- Simplex and duplex assemblies
- Duplex assemblies available with clips (SC and LC)
- Different connector performance range for specific application

Applications

- Gigabit Ethernet in high speed LAN networks over an indicative 275 m link length at 850 nm (SX) wavelength
- Legacy networks including Ethernet, Fast Ethernet and FDDI
- Data centers
- Premise cabling in data networks including backbone, riser and horizontal
- Support video, data and voice services

Connector Specification

Optical Performance	Singlemode	Conformance
IL Max/Master (Acceptance)	0.25 dB	IEC 61300-3-4
Ave/Master	0.18 dB	IEC 61300-3-4
Ave/Random	0.18 dB	IEC 61300-3-34

Fibre Specification

Characteristics	
Attenuation (dB) / km	3.0 @ 850nm / 0.8 @ 1300nm
Bandwidth OFL (MHz x km)	200 @ 850nm / 500 @ 1300nm

Cable Specification

Characteristics	Simplex	Duplex
Cable Material	LSZH and PVC	LSZH and PVC
Strength Member	Aramid	Aramid
Crush (N)	1000	1000
Operating Temperature (°C)	-20 to 60	-20 to 60
Fire Specification	IEC 60332-1	