


**TB-V24A**

- Outdoor use, Safety lock
- Designed for Wall mount applications
- Available only for SC adaptors (up to 24 Simplex SC adaptors)
- Accepts loose tube, distribution cables
- Bend radius protection
- Rugged and durable construction for long term reliability (UV resistance)
- Resistance to vibration and shock
- Door with secure mechanism
- Design for small and medium volumes of fiber optic cables
- Whole front operation
- Convenient for expansion of capacity
- Re-usable
- Sheath retention & central strength member termination system included
- ROHS compliance

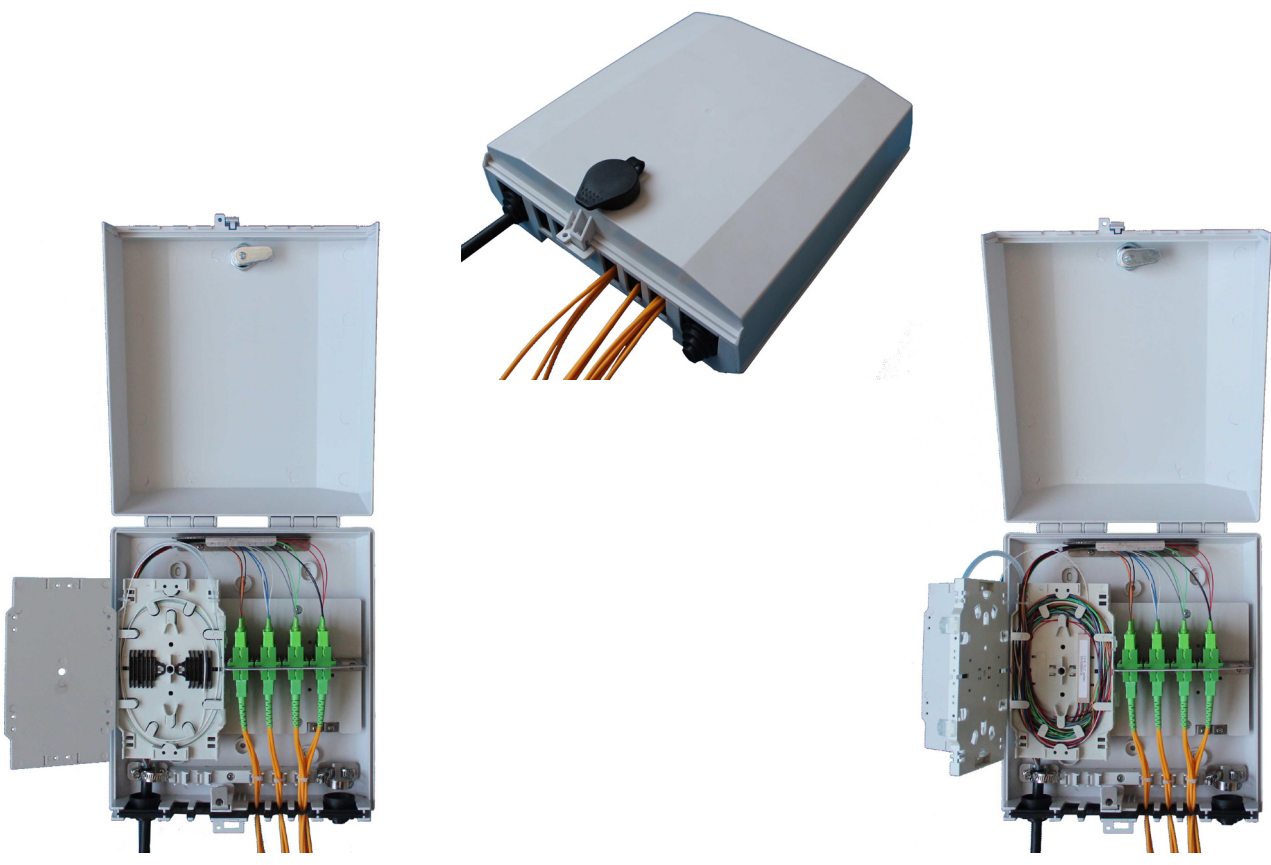

**Specifications**

Product Code	Dimensions	Number of entry exit ports	Splice Capacity	PLC Splitter	Adapter Capacity
ALF-TB-V24A	272.5x235x84.5 mm	2 inlet cable ports (for cables with max diameter 24.5 mm)	48 Splices (4x12 Splices)	1x8, 1x16 PLC Splitter	24 SC Simplex Adapter