

**TB-X100**

Compact enclosure(168x132x33mm)

The box allows the installation of fibers with a minimum bend radius of 25 mm over a length of 2 m

In-line and butt configuration possible for main cable

Universal splice holder for 8 splices: fusion splice, mechanical splice

Ready for PLC splitter installation

Cable inlet is provided at the bottom left side. Optionally the main cable can continue at the top left side

Wrap around pass-through

Cable outlet ports ( max. 2 cables) are provided at 5 sides: left, right, top, bottom, back  
IP rating , vertically mounted: IP43 (not for inline application: IP40).


Impact rating: IK08

UV resistant, Standard colour: RAL7035 grey

Gasventing provided Locking with screw, optionally security seal

Main cable up to 12 mm diameter

Drop cable up to 5 mm diameter

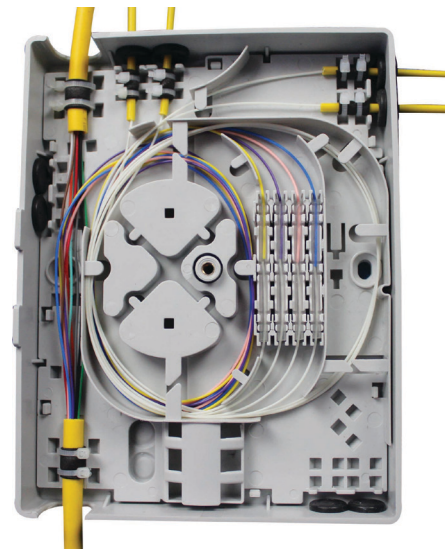

**Specifications**

Product Code	Dimensions	Number of entry exit ports	Splice Capacity	PLC Splitter	Adaptor Capacity
ALF-TB-X100	168x132x33 mm	Outlet ports (max 2 cables) are provided at 5 sides left, right, top, bottom, back	8 Splices	Ready for PLC Splitter Installation	-