


TB-X20

- Can accommodate 1x8 & 1X16 PLC splitter
- UV and weather proof
- Up to 16 FTTH drops
- Wall and pole mountable
- 2 inlet ports(for cables with max diameter 12mm), 16 outlet ports
- Protection class: TB-X20A: IP 65, TB-X20B: IP 54
- 16 Splice Capacity
- ROHS compliance
- FTTH access network
- Telecommunication Networks
- CATV Networks
- Data communications Networks
- Local Area Networks

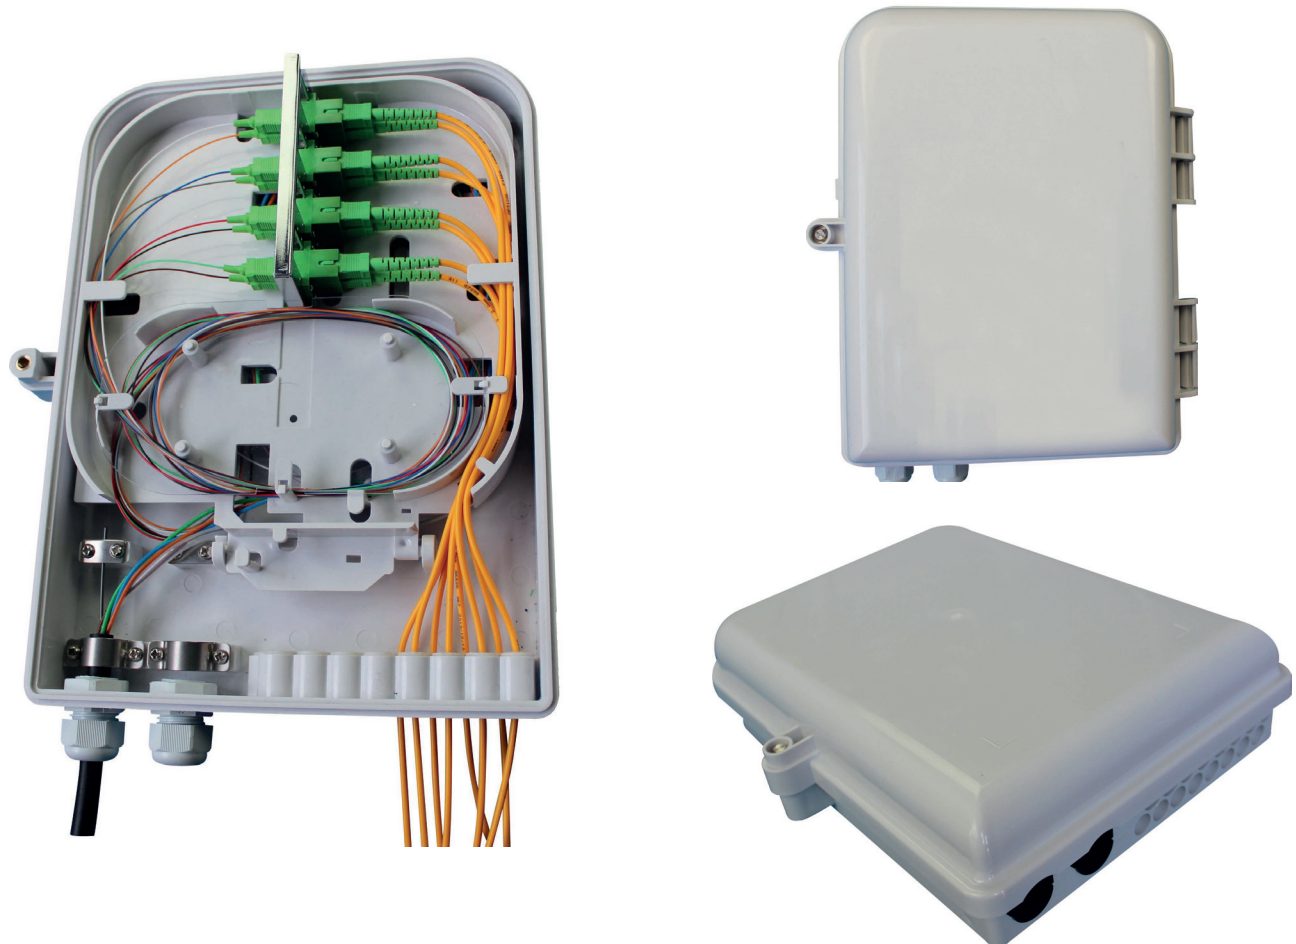

Specifications

Product Code	Dimensions	Number of entry exit ports	PLC Splitter	Protection Class	Adaptor Capacity
ALF-TB-X20A	320x260x90 mm	2 cable gland: each port for 1 cable with max 12 mm 16 drop cable ports	1x8, 1x16 Splitter	IP65	16 SC Simplex Adaptors
ALF-TB-X20B	320x260x90 mm	2 rubber port: each port for 1 cable with max 12 mm 16 drop cable ports	1x8, 1x16 Splitter	IP65	16 SC Simplex Adaptors