


TB-X21

Accommodate 1x8-1x16PLC Splitter Anti-UV (Ultra Violet), Waterproof Up to 16 FTTH Drops 2 inlet ports, 16 outlet ports Accommodate SC /LC Adaptor It is applicable for wall-mounted indoor or outdoor Max capacity(F): 16 - 315x236x100 mm 2 cable gland: each port for 1 cable with max 12 mm 16 drop cable ports; 2 rubber ports: each port for 1 cable with max 12 mm 16 drop cable ports, 16 Splices 1x8, 1x16 PLC Splitter 16 SC Simplex Adaptors

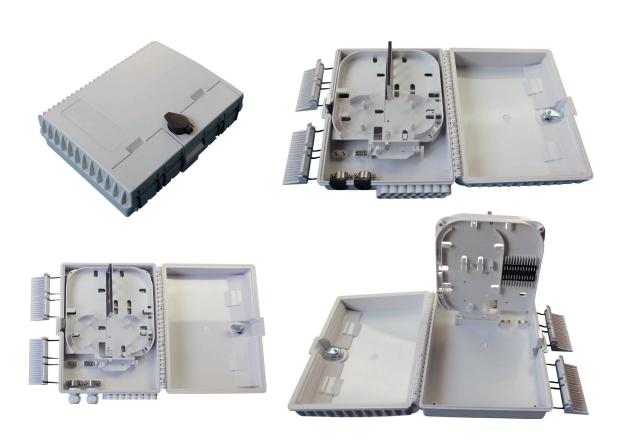

Specifications

Product Code	Dimensions	Number of entry exit ports	Splice Capacity	PLC Splitter	Adaptor Capacity
ALF-TB-X21A	315x236x100 mm	2 cable gland: each port for 1 cable with max 12 mm 16 drop cable ports	16 Splices	1x8, 1x16 Splitter	16 SC Simplex Adaptors
ALF-TB-X21B	315x236x100 mm	2 rubber port: each port for 1 cable with max 12 mm 16 drop cable ports	16 Splices	1x8,1x16 Splitter	16 SC Simplex Adaptors