


TB-X21

Accommodate 1x8-1x16 PLC Splitter
 Anti-UV (Ultra Violet), Waterproof
 Up to 16 FTTH Drops
 2 inlet ports, 16 outlet ports
 Accommodate SC /LC Adaptor
 It is applicable for wall-mounted indoor or outdoor
 Max capacity(F): 16 - 315x236x100 mm
 2 cable gland: each port for 1 cable with
 max 12 mm 16 drop cable ports;
 2 rubber ports: each port for 1 cable with max 12 mm
 16 drop cable ports, 16 Splices
 1x8, 1x16 PLC Splitter
 16 SC Simplex Adaptors

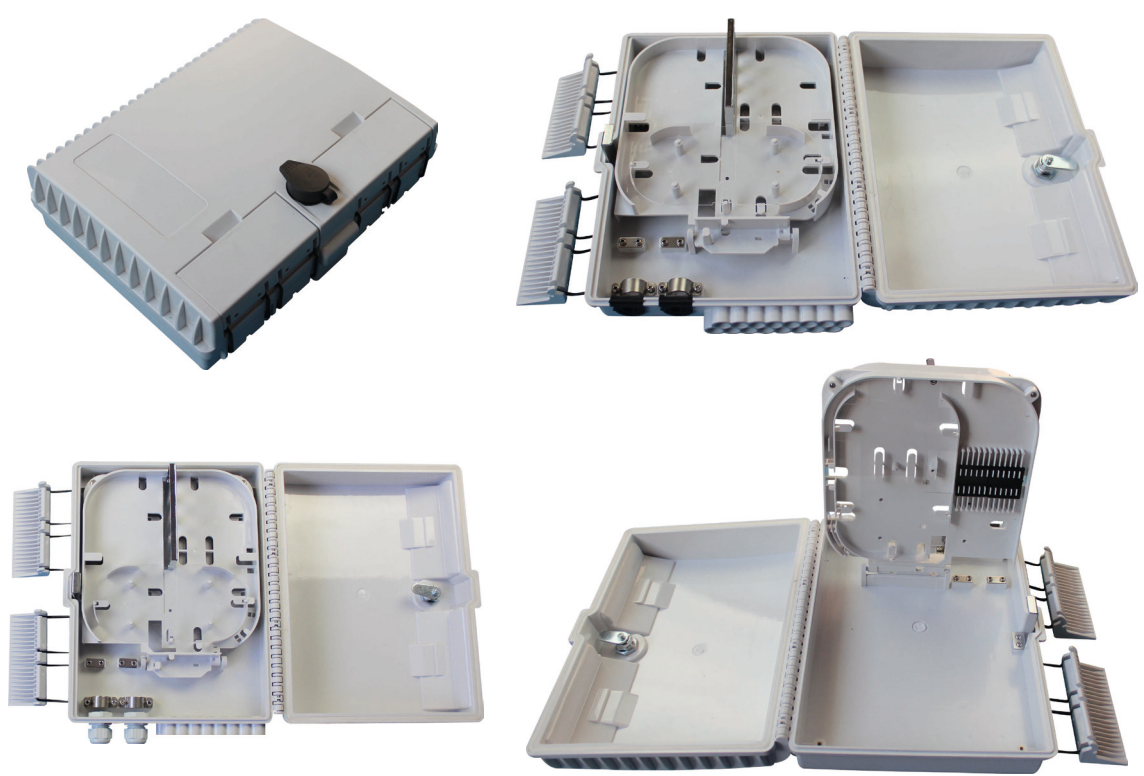

Specifications

| Product Code | Dimensions | Number of entry exit ports | Splice Capacity | PLC Splitter | Adaptor Capacity |
|--------------|----------------|---|-----------------|--------------------|------------------------|
| ALF-TB-X21A | 315x236x100 mm | 2 cable gland: each port for 1 cable with max 12 mm 16 drop cable ports | 16 Splices | 1x8, 1x16 Splitter | 16 SC Simplex Adaptors |
| ALF-TB-X21B | 315x236x100 mm | 2 rubber port: each port for 1 cable with max 12 mm 16 drop cable ports | 16 Splices | 1x8, 1x16 Splitter | 16 SC Simplex Adaptors |