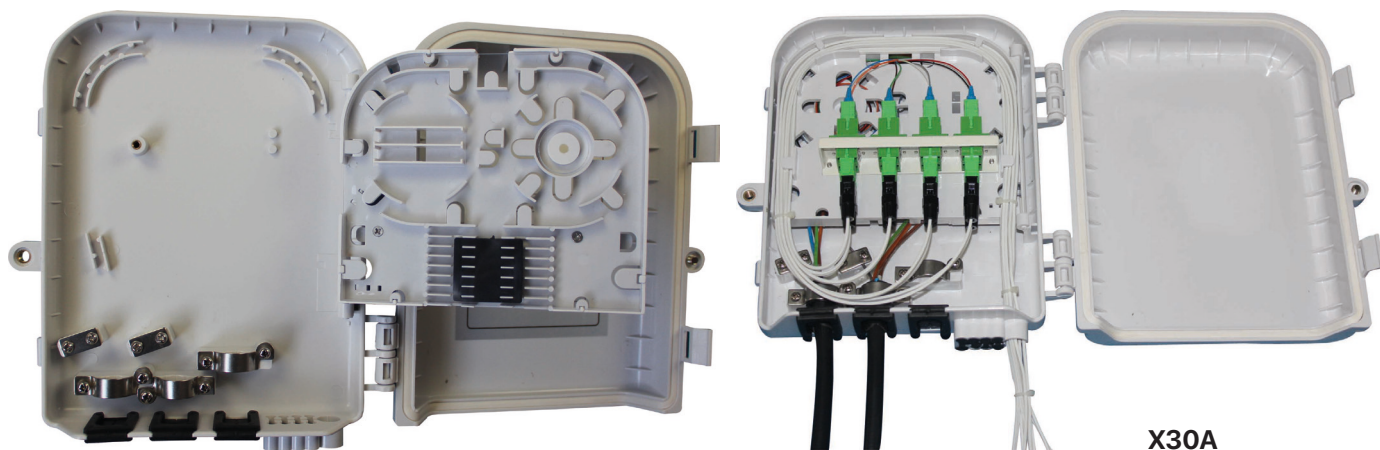


TB-X30

Resistance to chemical and U.V attack
Wall mounting or pole mounting.
ROHS Compliance
Widely used in FTTH access network
Telecommunication Networks
CATV Networks
Data communications Networks
Local Area Networks

**X30B****X30A****Specifications**

Product Code	Dimensions	Number of entry exit ports	Splice Capacity	PLC Splitter	Adaptor Capacity
ALF-TB-X30A	233x204x60 mm	3 cable ports(max 12 mm) 8 drop cables ports	8 Splices	1x4 / 1x8 PLC Splitter	8 SC Simplex Adaptors
ALF-TB-X30B	247x204x70 mm	2 cable ports(max 12 mm) 12 drop cables ports	12 Splices	1x4 / 1x8 / 1x16 PLC Splitter	12 SC Simplex Adaptors