


**TB-X40**

- Compact design (126 x 200 x 50 mm)
- Free breathing box for indoor use
- In-line and butt configuration possible for main cable
- Wrap around cable seals for main cable and drops
- Not required to cut loop-through fibers from riser cable
- Window cuts as small as 70 mm possible with certain cable constructions
- Compatible with mechanical splice, and heat shrink protective sleeves
- LSZH material
- Transient free customer provisioning
- Drop cables are terminated individually
- Separate storage of un-connected fibers from spliced drop fibers
- Possibility to integrate PON splitters
- Main cable up to 11 mm diameter, Drop cable up to 6 mm diameter
- Easy drop cable termination on strain relief device

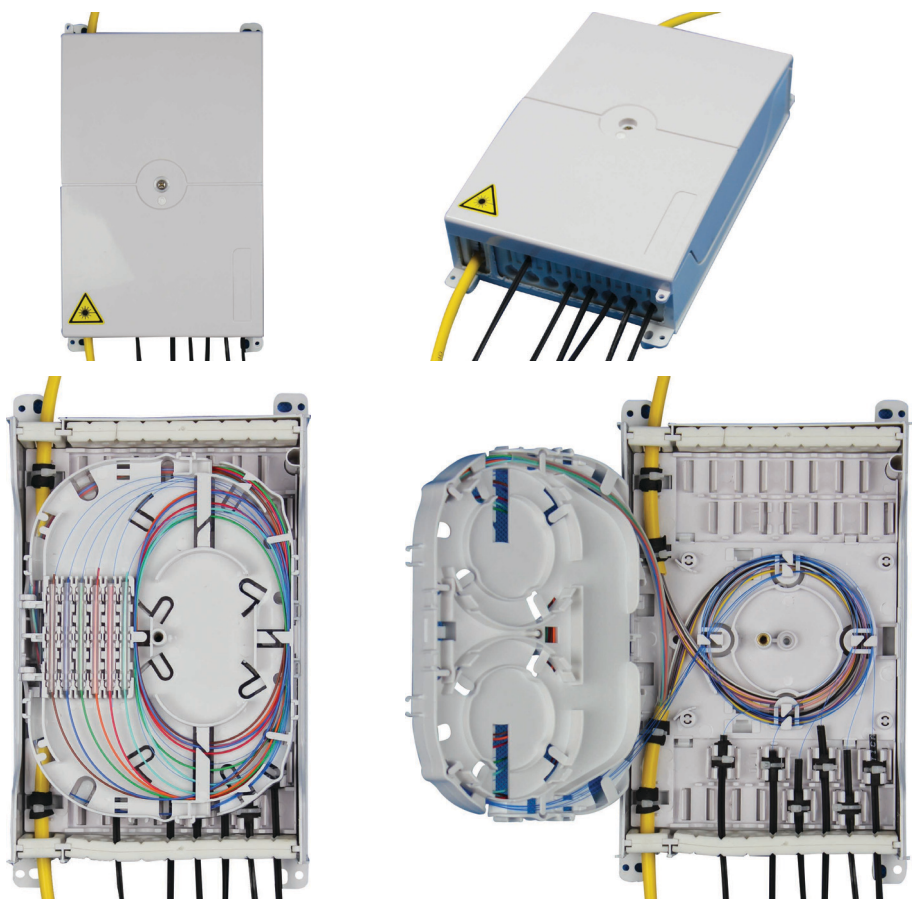

**Specifications**

Product Code	Dimensions	Number of entry exit ports	Splice Capacity	PLC Splitter	Protection Degree
ALF-TB-X40A	233x204x60 mm	3 cable ports (max 11 mm)	12 Splices	1x8, 1x16 PLC Splitter	IP54
ALF-TB-X40B	200x126x50 mm	16 drop cables ports (for Dropcable max 6 mm)	24 Splices	Not Available	IP54