
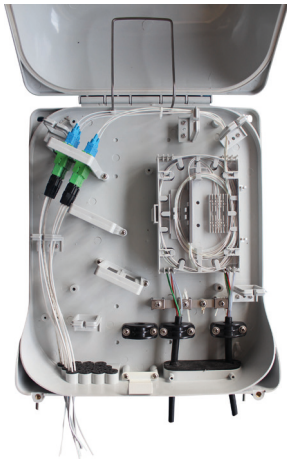
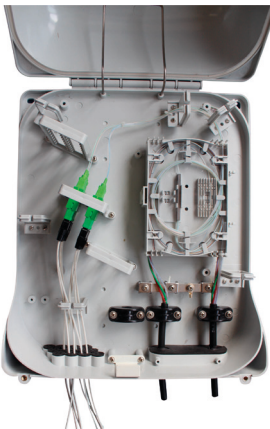
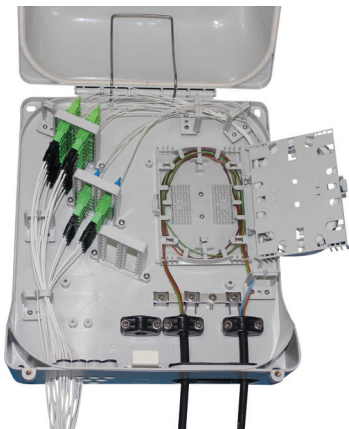


TB-X48A

- Designed for Wall and Pole mount applications
- Safety lock, Bending radius > 30mm
- Outdoor use(IP 65) Rugged and durable construction for long term reliability (UV resistance)
- Design for small and medium volumes of fiber optic cables, Re-usable
- ROHS compliance
- 398 mm x 327 mm x 118 mm (L x W x H)
- Up to 48 drop cables
- Up to 54 Simplex SC adaptors
- 6 pieces 1 x 8, 1 x 16 or 1 x 32 PLC Splitter
- Maximum capacity is 144F(6 trays)
- Capacity of splice trays is 24 fibers
- Oval port is 1 loop cable or 2 cablesmax Ø 20 mm
- The reserved port is for cables with max Ø 18 mm
- The 12 ports with diameter Ø 14 mm each port can hold 4 drop cables

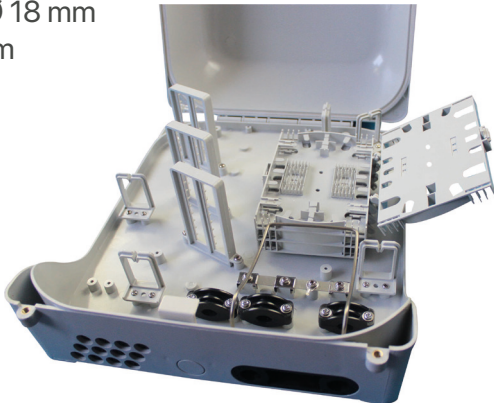

Specifications

Product Code	Dimensions	Number of entry exit ports	Splice Capacity	PLC Splitter	Adaptor Capacity
ALF-TB-X48A	398x327x118 mm	1 loop cable or 2 cables (max 20 mm) The reserved port (max 18 mm) 48 drop cables	144 Splices	up to 6 pcs 1x8, 1x16 or 1x32 Splitter	54 SC Simplex Adaptors