


TB-V24A Termination Box

Multipurpose fiber optic termination box TB-V24A is used to provide a flexible platform to address the multitude of applications that exist in residential and commercial FTTx installations. Can be delivered with pre-installed SC adaptors. Easy to install and is capable of being mounted directly to standard electrical junction boxes or directly to wall. The box interior can be configured to address slack storage, splicing, cross connect, hardened adapter applications or any combination. The Distribution box kit includes all the necessary accessories –parts for complete box installation.



Features

- ✓ Outdoor use
- ✓ Designed for Wall mount applications
- ✓ Safety lock
- ✓ Available only for SC adaptors (up to 24 Simplex SC adaptors)
- ✓ Accepts loose tube, distribution cables
- ✓ Bend radius protection
- ✓ Rugged and durable construction for long term reliability (UV resistance)
- ✓ Resistance to vibration and shock
- ✓ Door with secure mechanism
- ✓ Design for small and medium volumes of fiber optic cables
- ✓ Whole front operation
- ✓ Convenient for expansion of capacity
- ✓ Re-usable
- ✓ Sheath retention & central strength member termination system included
- ✓ ROHS compliance

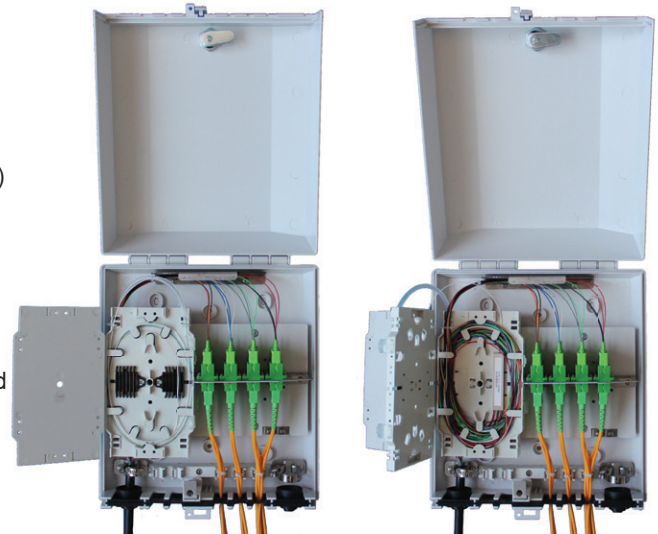

Specifications & Ordering Information

Order No	Dimensions LxWxH(mm)	Cable Ports	Spliced Fiber Storage Capacity	PLC Splitter	Adaptor Capacity
ALF-TB-V24A	272.5x235x84.5	2 inlet cable ports(for cables with max diameter 24.5 mm)	48 Splices (4x12 Splices)	1x8, 1x16 PLC Splitter	24 SC Simplex Adaptors